
E1 HP DATA SHEET

SPECIFICATIONS & PERFORMANCE

E1-HP 1” High Pressure Pumps

PERFORMANCE

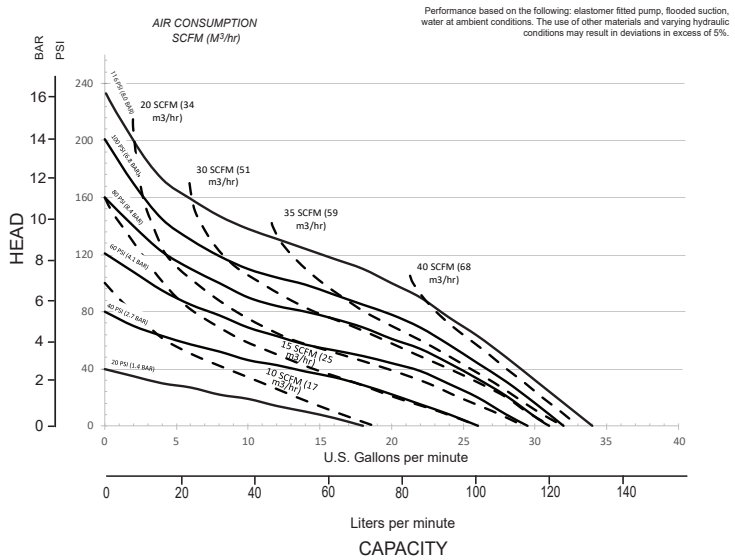



NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate
Adjustable to . . . . 0-33 gpm (125 lpm)
Port Size
Suction . . . . . .1.0”
Discharge . . . . . .1.0”
Air Inlet . . . . . .3/8” NPT
Air Exhaust . . . . . .1/2” BSP
Heads Up To . . . . . 232 PSI (535 ft)
. . . . . 16.0 BAR (163 meters)
Maximum Operating Pressure. . . . . .
. . . . . 116 PSI (8.0 BAR)
Max Solid Size (Diameter)
. . . . . 1/8” (3 mm)
Shipping Weights
Aluminum . . . . . 52.2 lbs (25.5kg)
Stainless Steel . . . . 76.1 lbs (34.5kg)

DIMENSIONS

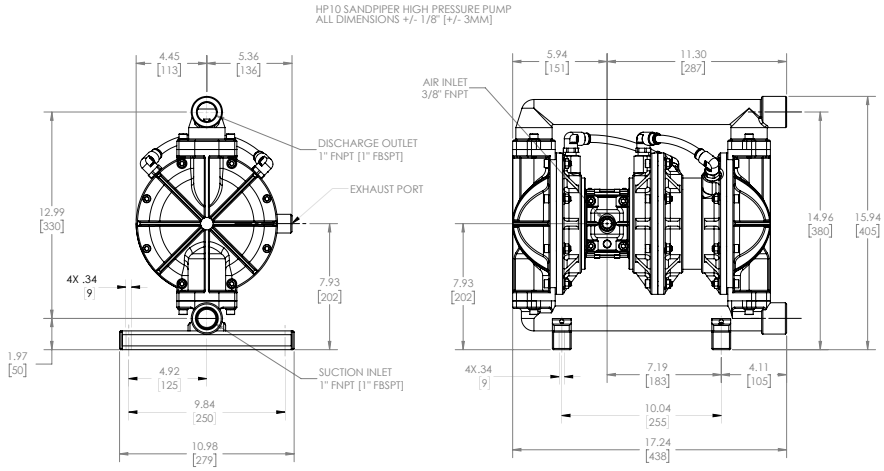

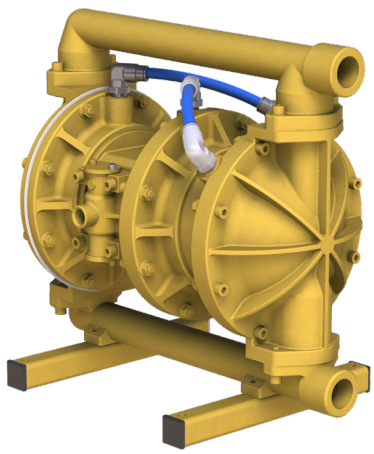

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

E1HP-rev0721

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

Your partner for Versamatic AODD pumps

VM E1 Specialty HP Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.