
E40 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1 1/2" Bolted Metal
with Metal Center Sections

PERFORMANCE

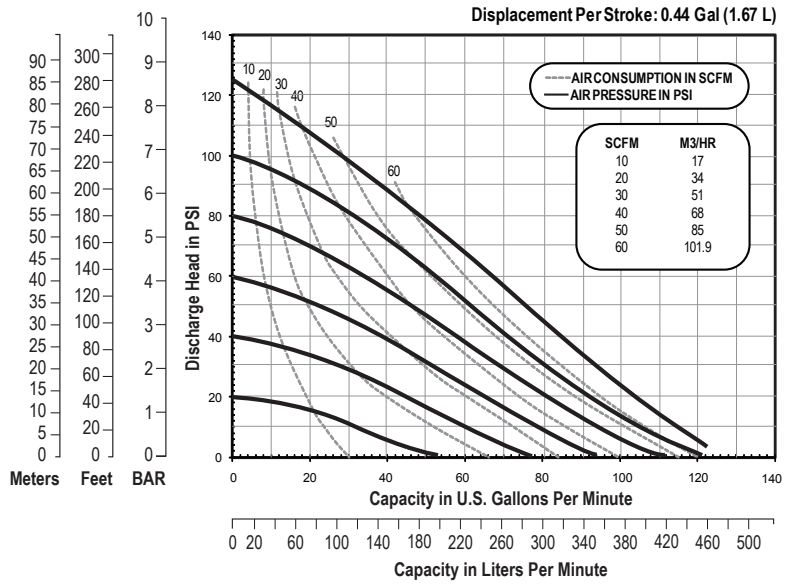



NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate
Adjustable to . . . 0-123 gpm (465 lpm)
Port Size
Suction . . . . 1½" (38.1mm) NPT/BSP
Discharge . . 1½" (38.1mm) NPT/BSP
Air Inlet . . . . . ½" NPT
Air Exhaust . . . . . 1" NPT
Suction Lift
Dry . . . . . 19' (5.8 m)
Wet . . . . . 31' (9.4 m)
Max Solid Size (Diameter)
. . . . . ¼" (6 mm)
Max Noise Level . . . . . .101 dB(A)
Shipping Weights
Aluminum . . . . . .55 lbs (25 kg)
Cast Iron . . . . . .95 lbs (43 kg)
Stainless Steel . . . . . .92 lbs (42 kg)
**w/ Stainless Center add 21 lbs (9.5 kg)

DIMENSIONS

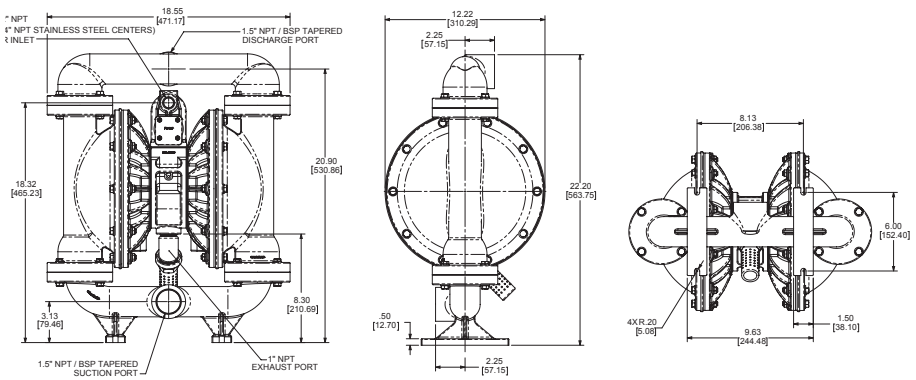

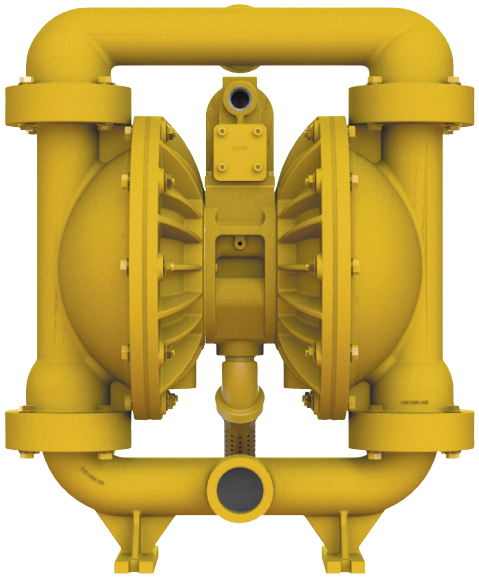

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e40mdlCdsATEX-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

Your partner for Versamatic AODD pumps

VM E40 Bolted-Metal Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.