
E40 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1 1/2” Bolted Plastic

with Plastic Center Sections


PERFORMANCE

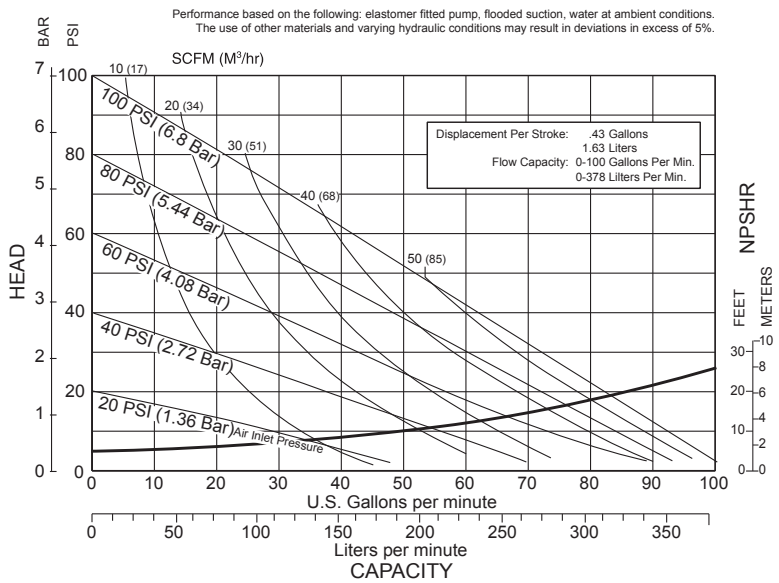


SPECIFICATIONS

Flow Rate
Adjustable to 0-100 gpm (0-378 lpm)
Port Size
Suction . . . . . .1 1/2” ANSI / DIN
Discharge . . . . . .1 1/2” ANSI / DIN
Air Inlet . . . . . 3/4” NPT
Air Exhaust . . . . . .1” NPT
Suction Lift
Dry . . . . . .19’ (5.8 m)
Wet . . . . . .29’ (8.8 m)
Max Solid Size (Diameter)
. . . . . 0.47” (12 mm)
Max Noise Level . . . . . 89 dB(A)
Shipping Weights
Polypropylene . . . . . 82 lbs. (37kg)
PVDF . . . . . .112 lbs. (51kg)
Conductive Poly . . . . 85 lbs. (38kg)

DIMENSIONS

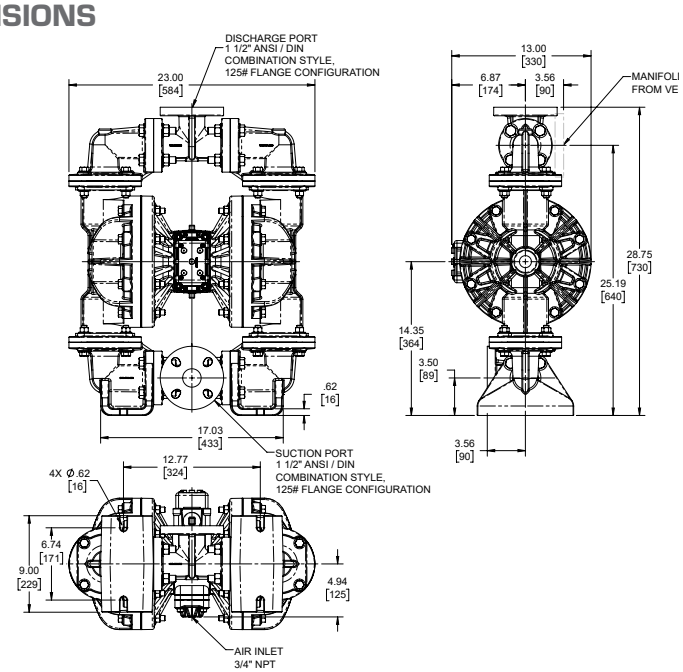

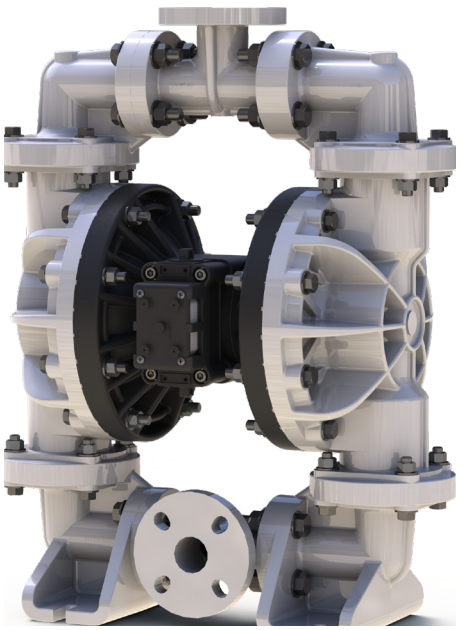

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289
VERSAMATIC.COM

e40nmdlCdsATEX-rev0120

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

Your partner for Versamatic AODD pumps

VM E40 Bolted-Plastic Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.