
# E4 DATA SHEET

## SPECIFICATIONS & PERFORMANCE

# 1 1/2” Bolted Plastic

with Metal Center Section

## PERFORMANCE

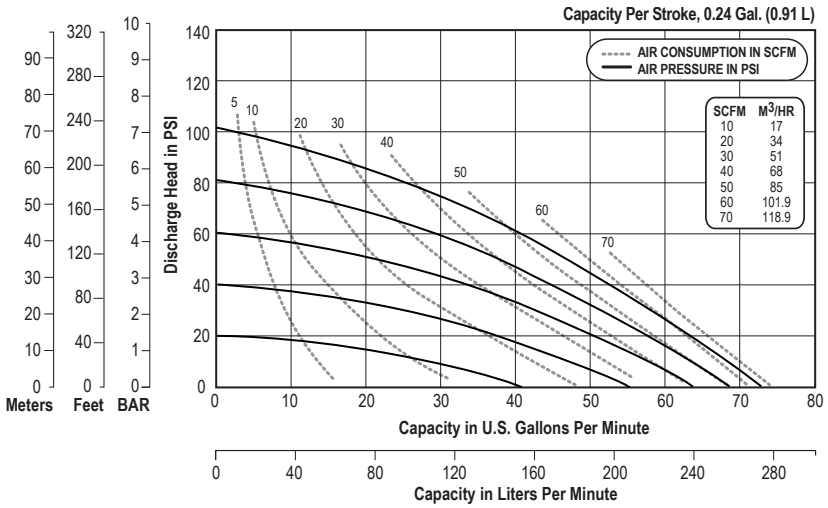


NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## SPECIFICATIONS

**Flow Rate**

Adjustable to . . .0-72 gpm (272 lpm)

**Port Size**

Suction . . . . . 1 1/2” ANSI

Discharge . . . . . 1 1/2” ANSI

**Air Inlet** . . . . . 1/2” NPT

**Air Exhaust** . . . . . 3/4” NPT

**Suction Lift**

Dry . . . . . .15’ (4.5 m)

Wet . . . . . .25’ (7.6 m)

**Max Solid Size (Diameter)**

. . . . . .3/16” (4.76 mm)


**Max Noise Level** . . . . . 89 dB(A)


**Shipping Weights**

Polypropylene . . . . . 55 lbs (25 kg)

Kynar. . . . . 55 lbs (25 kg)

## DIMENSIONS

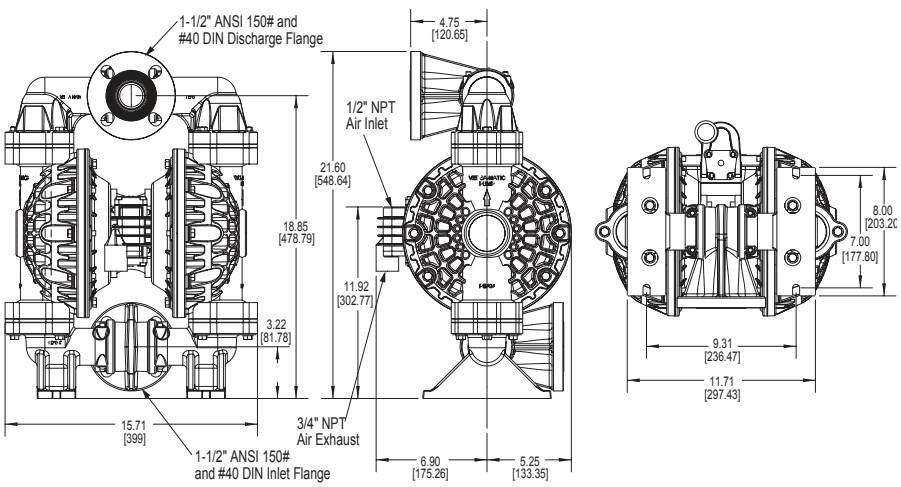

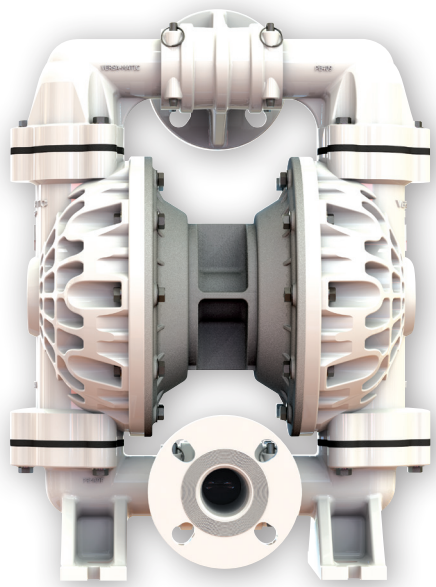
VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation

800 North Main Street | Mansfield, OH 44902 USA

Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM


e4nmdlAds-rev1019


©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.



VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany

Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

## Your partner for Versamatic AODD pumps

VM E4 Bolted-Plastic Data Sheet

**VIPTech GmbH**
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.