
E6 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1/4” Clamped Plastic

with Plastic Center Sections

PERFORMANCE

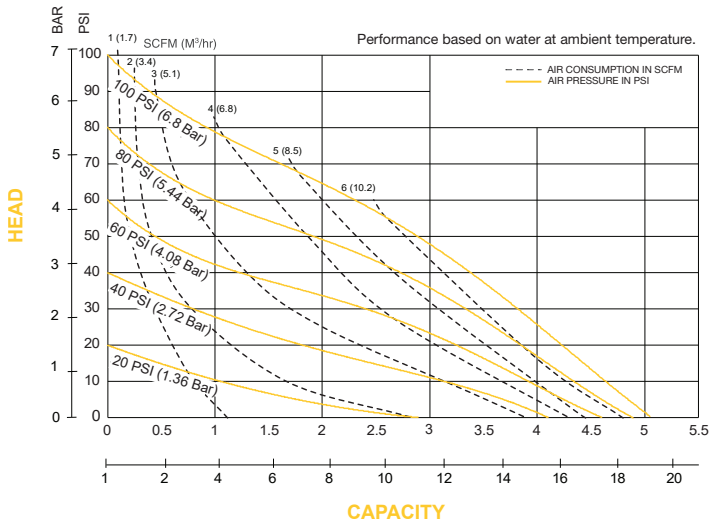



SPECIFICATIONS

Flow Rate
Adjustable to . . . . . 0-5 gpm (19 lpm)
Port Size
Suction . . . . . 1/4” NPT (BSP)
Discharge . . . . . 1/4” NPT (BSP)
Air Inlet . . . . . .1/4” NPT
Air Exhaust . . . . . .1/4” NPT
Suction Lift
Dry . . . . . 8’ (2.44 m)
Max Solid Size (Diameter)
. . . . . 1/32” (1 mm)
Max Noise Level . . . . . .78 dB(A)
Shipping Weights
Polypropylene . . . . . 3.3 lbs (1.5 kg)
Kynar. . . . . 3.9 lbs. (1.8 kg)

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

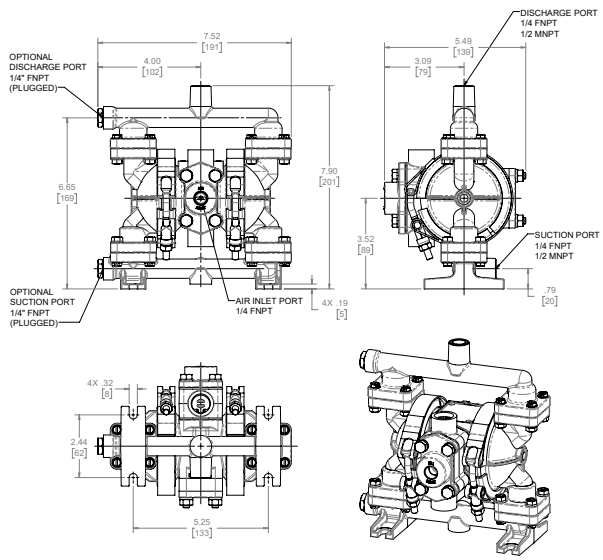

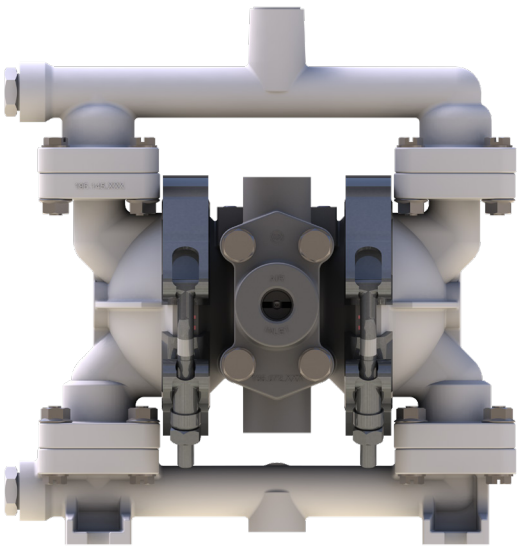

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289
VERSAMATIC.COM

e6nmdlCds-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech

Your partner for Versamatic AODD pumps

VM E6 Bolted-Plastic PP-PVDF ohneATEX Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.