
E7 DATA SHEET

SPECIFICATIONS & PERFORMANCE

3/4”Bolted Metal-ATEX

with Metal Center Sections

PERFORMANCE

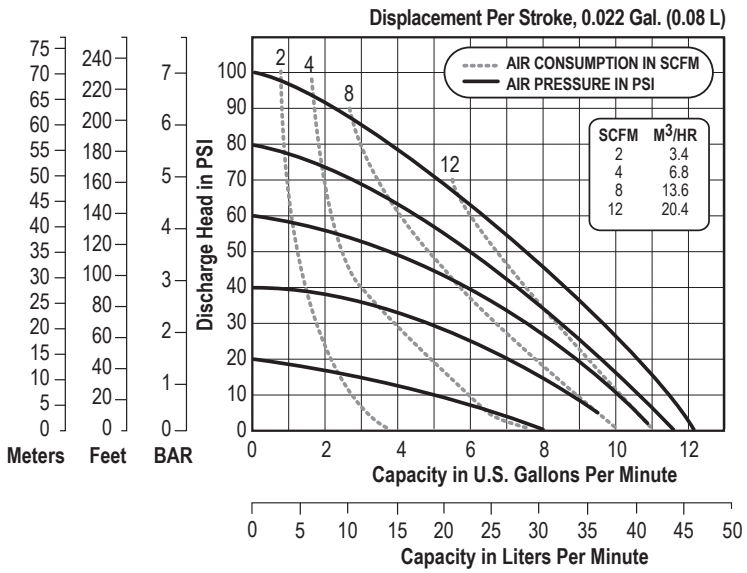

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate

Adjustable to . . . .0-12 gpm (45.4 lpm)

Port Size

Suction . . . . . .3/4” NPT

Discharge . . . . . .3/4” NPT

Air Inlet . . . . . .3/8” NPT

Air Exhaust . . . . . .3/8” NPT

Suction Lift

Dry . . . . . 13’ (3.9 m)

Wet . . . . . 22’ (6.7 m)

Max Solid Size (Diameter)


. . . . . 1/16” (1.6 mm)


Max Noise Level . . . . . .84 dB(A)

Shipping Weights

Aluminum . . . . . 11 lbs (3.9 kg)

DIMENSIONS

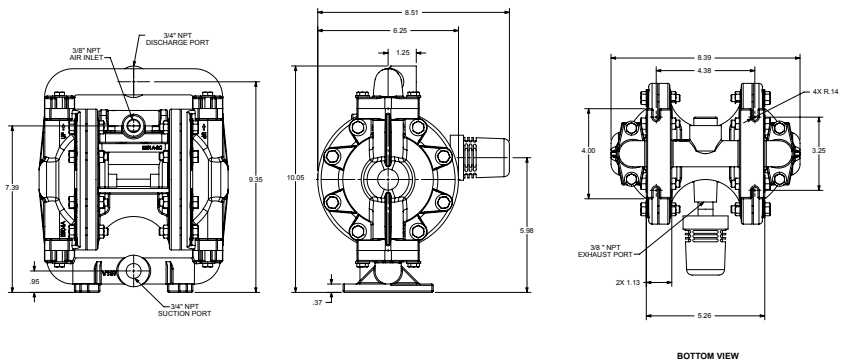

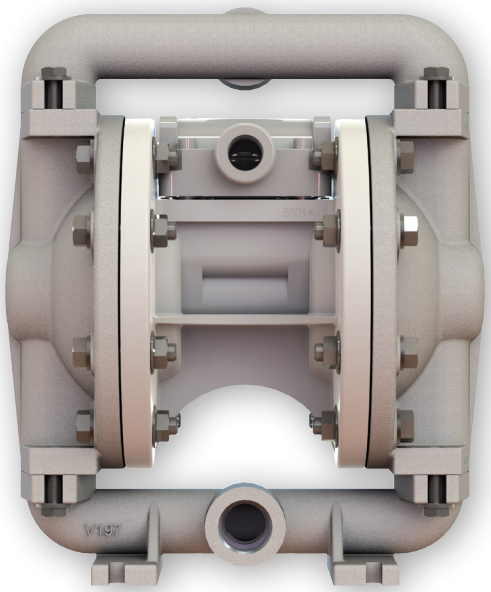

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e7mdlCds-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

Your partner for Versamatic AODD pumps

VM E7 Bolted-Metal Alu ATEX Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.