
E8 DATA SHEET

SPECIFICATIONS & PERFORMANCE

3/8” Bolted Plastic

with Plastic Center Sections

PERFORMANCE

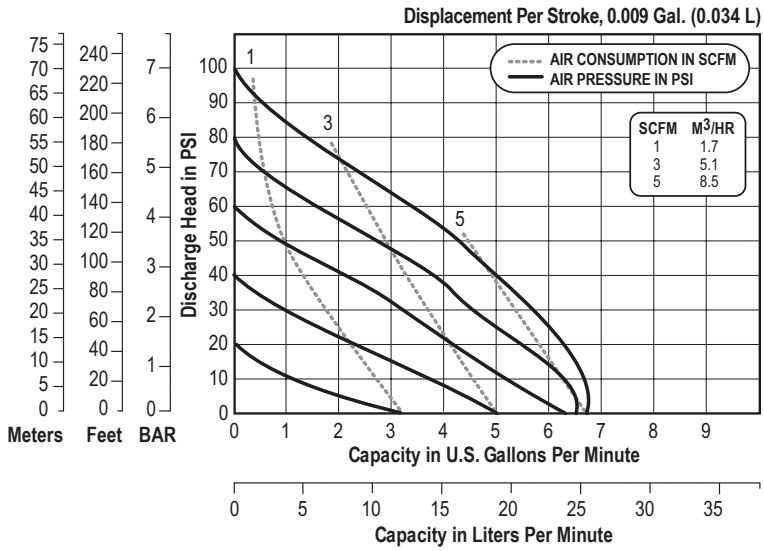

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate

Adjustable to . . . 0-6.8 gpm (25.7 lpm)

Port Size

Suction . . . . . 3/8” NPT (BSP)

Discharge . . . . . 3/8” NPT (BSP)

Air Inlet . . . . . .1/4” NPT

Air Exhaust . . . . . .1/4” NPT

Suction Lift

Dry . . . . . 8’ (2.44 m)

Max Solid Size (Diameter)

. . . . . .0.10” (2.25 mm)


Max Noise Level . . . . . .78 dB(A)


Shipping Weights

Polypropylene . . . . . 3 lbs (1.40 kg)

Kynar. . . . . 4.5 lbs. (2.04 kg)

DIMENSIONS

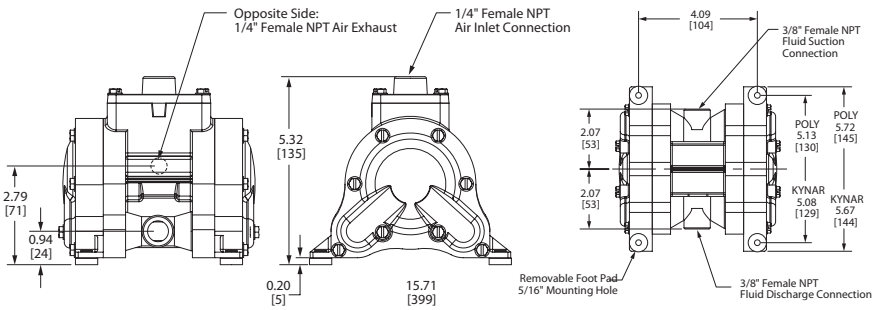

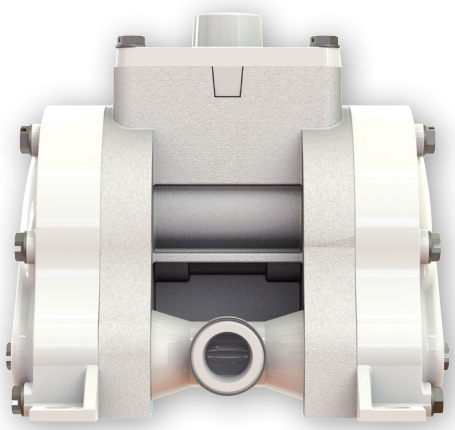

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation

800 North Main Street | Mansfield, OH 44902 USA

Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e8nmdlAds-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

Your partner for Versamatic AODD pumps

VM E8 Bolted-Plastic Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.