
E2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

2” Bolted Metal – ATEX

with Metal Center Section


PERFORMANCE

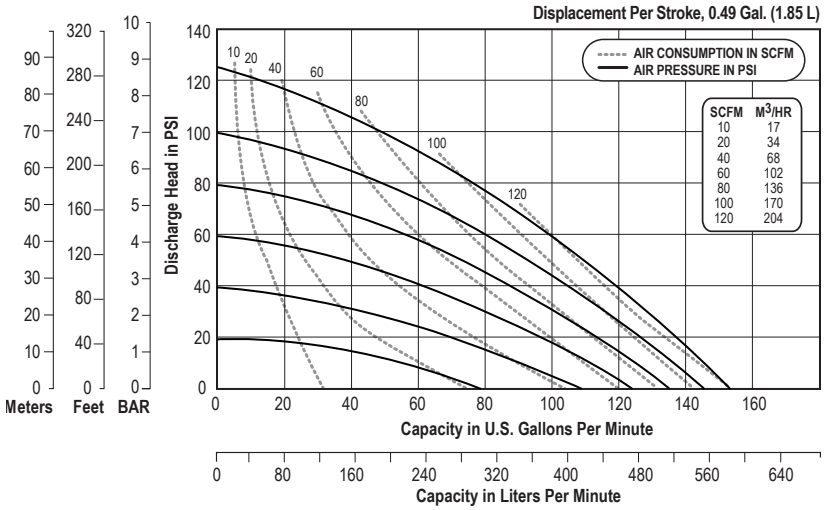

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate
Adjustable to . .0-160 gpm (606 lpm)
Port Size
Suction . . . . . .
2” ANSI Flange (DIN Compatible)
Discharge . . . . . .
2” ANSI Flange (DIN Compatible)
Air Inlet . . . . . 1/2” NPT
Air Exhaust . . . . . .1” NPT
Suction Lift
Dry . . . . . .14’ (4.3 m)
Wet . . . . . .30’ (9.1 m)
Max Solid Size (Diameter)
. . . . . 1/4” (6 mm)
Max Noise Level . . . . . 94 dB(A)
Shipping Weights
Stainless . . . . . 114 lbs (51.7 kg)
Cast Iron . . . . . 113 lbs (51.2 kg)

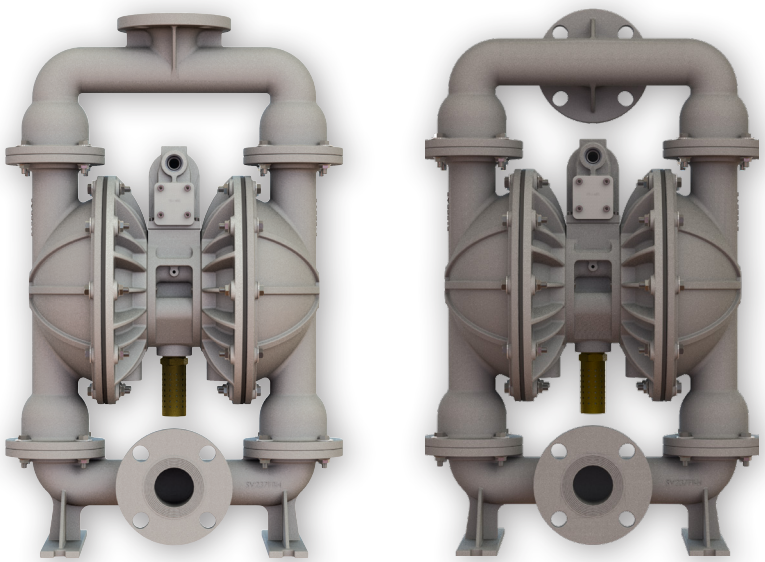

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289
VERSAMATIC.COM

e2mdlCdsATEXMB-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

E2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

2” Bolted Metal – ATEX


with Metal Center Section

DIMENSIONS

E2 Bolted Metal - Optional Horizontal Discharge

Dimensions in inches (mm dimensions in brackets)


The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

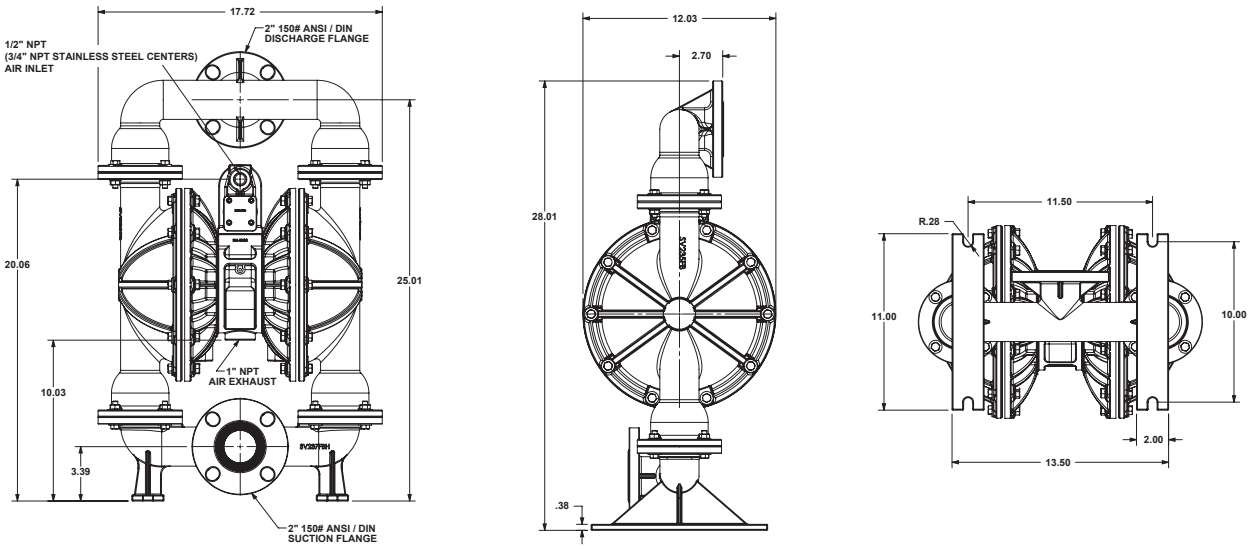

E2 Bolted Metal - Vertical Discharge

Dimensions in inches (mm dimensions in brackets)

The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

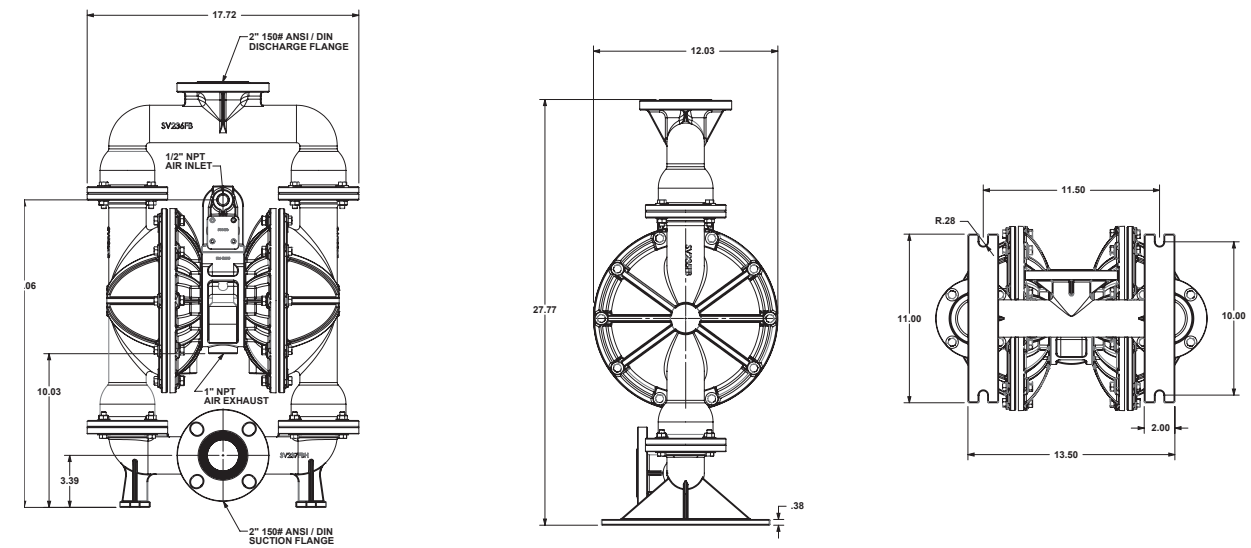

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e2mdlCdsATEXMB-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

E2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

2” Bolted Metal – ATEX

with Metal Center Section


DIMENSIONS

E2 Bolted Metal

Dimensionally Interchangeable with Versamatic Clamped Pump

Dimensions in inches (mm dimensions in brackets)

The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

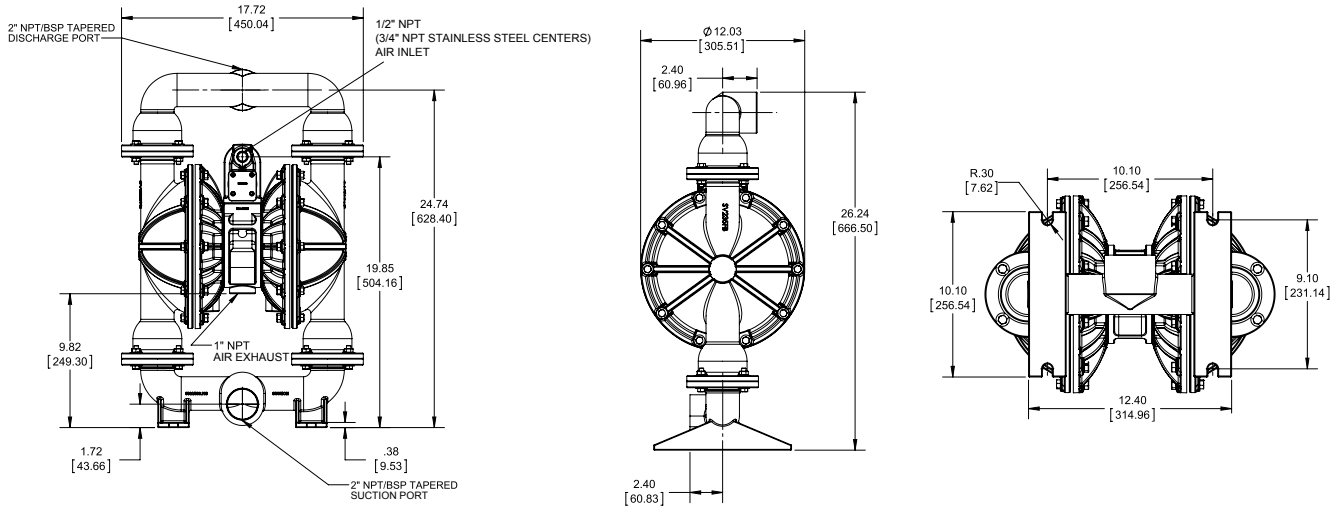


E2 Bolted Metal

Dimensionally Interchangeable with Wilden Clamped Pump

Dimensions in inches (mm dimensions in brackets)

The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

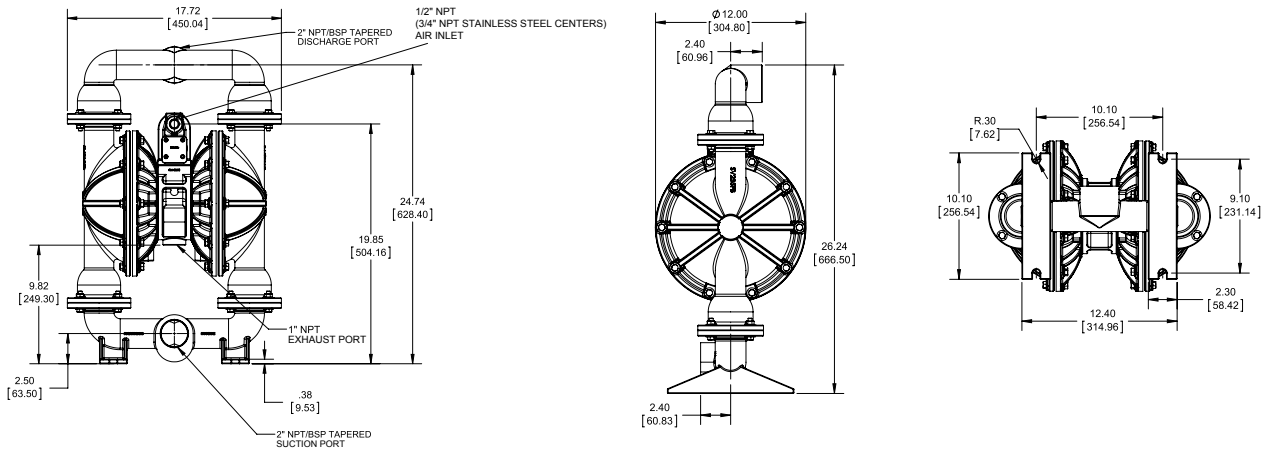

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e2mdlCdsATEXMB-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

VIPTech Distribution Germany & Austria: VIPTech GmbH · Lessingstraße 12 · 72663 Großbettlingen · Germany
Phone +49 7022 948735 · info@viptech.net · www.viptech.net · Shop & spare parts: aodd-pumpen.de

VIPTech

Your partner for Versamatic AODD pumps

VM E2 Bolted-Metal Edelstahl ATEX Data Sheet

VIPTech GmbH
Lessingstraße 12
72663 Großbettlingen
Germany

Phone: +49 7022 948735
E-mail: info@viptech.net
Web: www.viptech.net
Online shop: aodd-pumpen.de

Sales, technical advice, spare parts and repair kits for Versamatic air-operated double diaphragm pumps - Germany and Austria.

aodd-pumpen.de

viptech.net

This document is the original manufacturer documentation (Warren Rupp, Inc. / Versamatic), supplemented with VIPTech contact details. Technical content unchanged.